

Installing Guide For E7006-25 Mitsubishi 09 Outlander

1. Take off the wind letout from the bottom up on the left side, then pull it out.



2. Take off the wind letout on the right side at the same method.



3. Remove the two screws of the console panel, then take out the inside frame first.




4. Prepare for taking out the outside frame, then remove the four screws of the bracket.



5. Use the factory method of the camera cable connection.

(1)The yellow one is the power cable,the white one is for the reverse detect,connect it to the three FLYAUDIO special cables for the reverse detect.

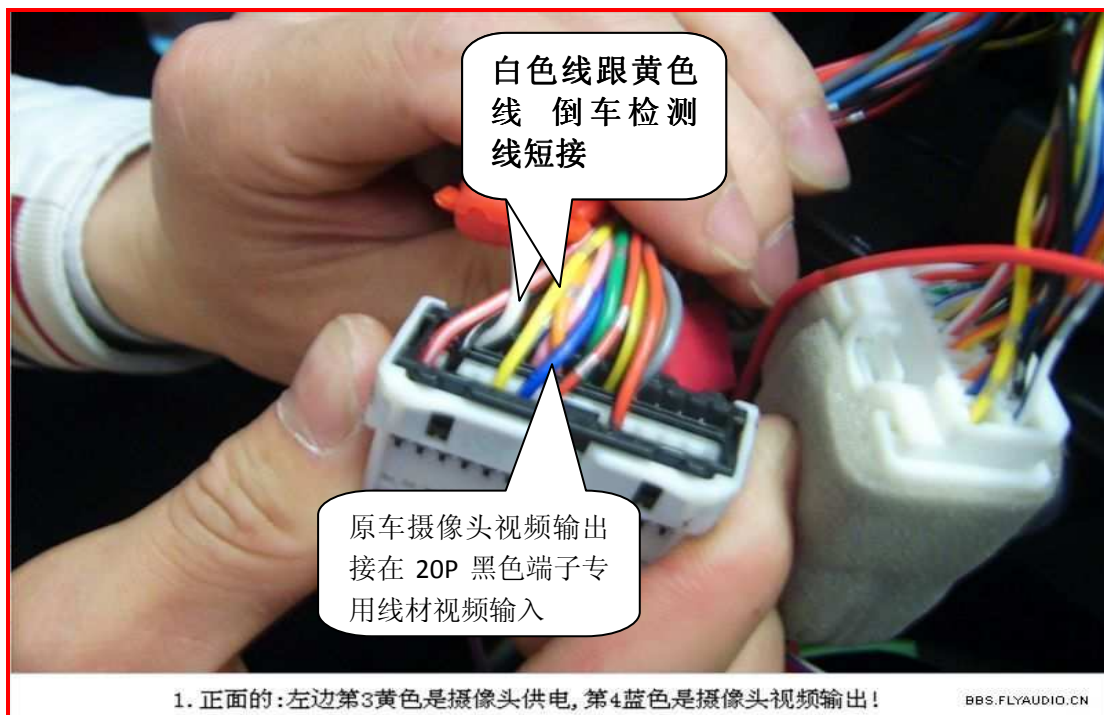

(2)From the front side:the third one which is yellow from the left is the cable for the power of the camera,the fourth one which is blue is for the output of the camera video




(3)from the reverse side:the first one which is white from the right is the cable for reverse control(12V when reversing)

6. Connect the special cables, then fix the GPS antenna to the right place.



7. Install the special bracket.

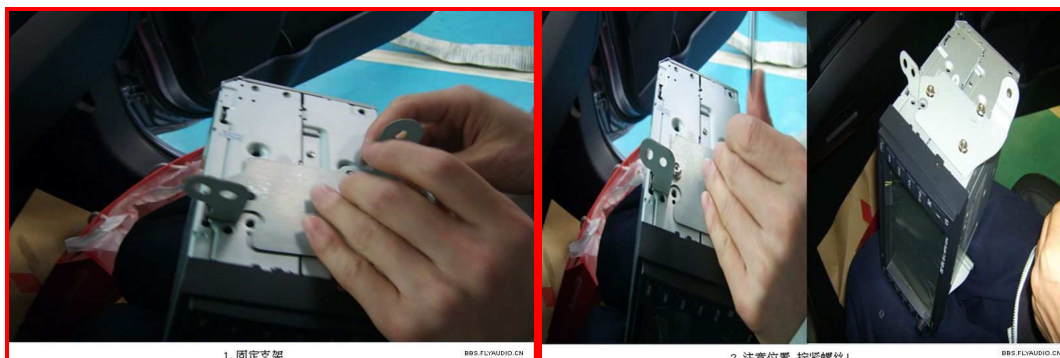

8. Connect the cables to the interface on the rear of main unit. And see the car entertainment effect after the installation of the FLYAUDIO main unit.

